

# Environmental Certification Scheme

Carpet Name: **UPSTREAM**


Licensee: **ABOVE LEFT**  
Licence Number: **2001**  
Label Number: **19003**

Certification Approved: **30/08/2017**

Level: **4**

ACCS Contract Grading: **CHD 3\***  
ACCS Residential Grading: **REHD2 6\***  
Suitable for Stairs: **Yes**

Date Printed: **15/01/2019**

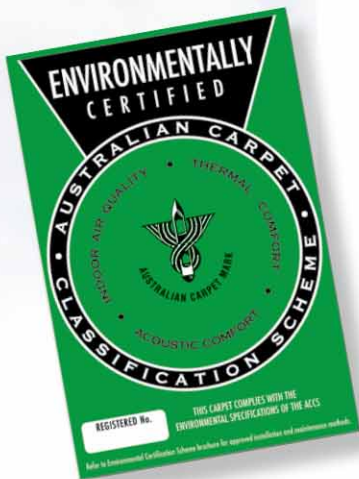

*Allan Firth*



**Allan Firth**  
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303  
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560  
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

**Carpet Details:**

**Company: ABOVE LEFT**

**Label No: 19003**

**Licence No: 2001**

**Office No: 6748**

**Names:**

UPSTREAM

**Details:**

Awarded Res Grade: REHD2 6\*  
 Awarded Con Grade: CHD 3\*  
 Registered On: 15/01/2019  
 Active: Yes  
 Date In-Active:  
 Manufacture Method: Tufted  
 Twist Set: N/A  
 Dyeing Method: Melt Dyed  
 #Colours/Designs: 4-5  
 Backing Type: Other  
 Felted: N/A  
 Spinning System: BCF  
 Insect Resist Agent: N/A  
 Filament: 20  
 Master Product: 17065

**Test Results:**

Pile Mass g/m<sup>2</sup> (oz/yd<sup>2</sup>): 475 (14.0)  
 SPM g/m<sup>2</sup> (oz/yd<sup>2</sup>): 297 (8.8)  
 Stated Pile Height (mm): 3.2  
 Minimum Pile Height (mm): 2.5  
 Maximum Pile Height (mm): 5.0  
 Dynamic Loading Loss (%): 0.0  
 Static Loading Loss (%): 0.0  
 Tex (g/1000m): 246  
 Measured Pile Thickness (mm): 2.6  
 Machine Gauge (Tufts/dm): 47.0  
 Meas Tufts Perp to Selvedge: 47.9  
 Meas Tufts Para to Selvedge: 48.4  
 Treated For Soiling Resistance: Yes  
 Soil Resist Inhibitor: Yes  
 Stain Resist Inhibitor: Yes

**Hexapod Scores:**

	Texture		Colour		Thickness	
	WA	WA	WA	WA	(mm)	(%)
1500:	4.5	4.5	4.5	4.5	0.5	18.8
8000:	3.0	3.0	4.0	4.0	1.3	19.6

Quality Assurance Test:

Cut Pile (%): 0  
 Loop Pile (%): 100  
 Panel Assessment Contract: 13  
 Panel Assessment Residential: 13  
 Suitable For Stairs: Yes  
 Tile: Yes SheetGoods: No  
 Fibre Signature: NBA:100

**ACCS Test:**

	Con	Res	Max
SPM/PH Ratio:	12.8	16	16
Volume Density:	14.9	14.9	20
Tuft Density:	9	9	9
Dyn Load:	3.9	3.9	5
Stat Load:	4.1	4.1	5
Soiling Prop:	14	14	16
Abrasion Res:	7.6	7.6	10
Sub Total:	66.3	69.5	81
Panel Assess:	13	13	19
Total:	79.3	82.5	100
Calc Residential Grade:	REHD2	6*	
Calc Contract Grade:	CHD	3*	

**Calculations**

Pile Height(mm): 2.7  
 Tuft Density(per dm<sup>2</sup>): 2318.4  
 GSPM(g/m<sup>2</sup>): 397.0  
 GSPM (abrasive) (g/m<sup>2</sup>): 275.0  
 Soiling Propensity: 12.0 +2.0

**OAF Values**

OAF: 4.2  
 Calc Density (+-5%): 0.11 0.114 0.12  
 Base Fibre: NYLON  
 Benchmarks:  
 RHD1 0 RHD2 3.5  
 REHD1 3.5 REHD2 3.5

**Environmental Classification:**

ECS: Yes  
 Level: 4

	Calc	B/M	P/F
Acoustic:	2.6	3	
Thermal:	22.8	15	PASS
VOC:			
TVOC	113		

**Notes:**

15/01/2019 - Cloned From Master - (17065) by S Elrington.